


PRESSURE CONTROLS

Ranco® controls from Robertshaw



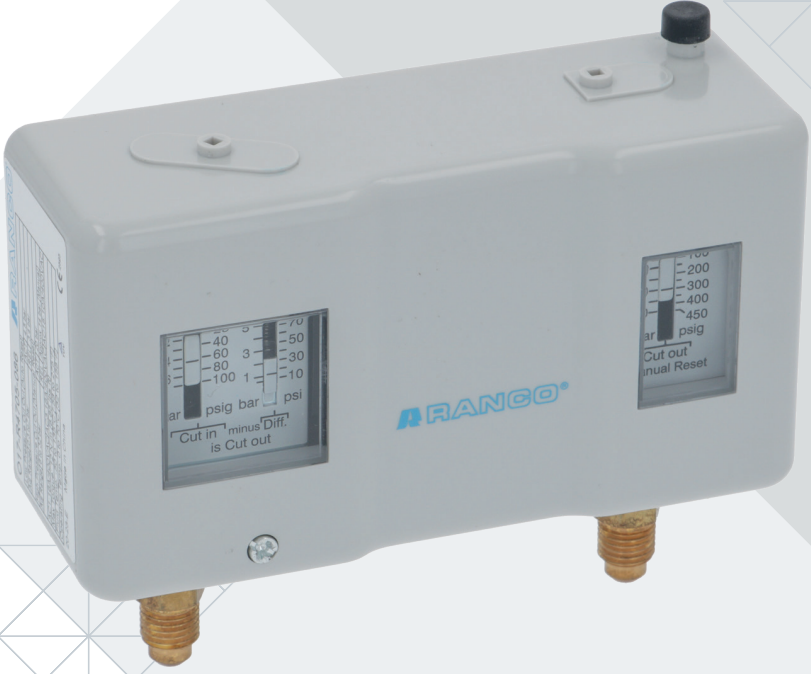

LF Code: 3320270
GEV Code: LF3320270



LF Code: 3320271
GEV Code: LF3320271



LF Code: 3320272
GEV Code: LF3320272



LF Code: 3320273
GEV Code: LF3320273

PRESSURE SW. RANCO DUAL 17-R4701 S. HD

Automatic reset LP
Automatic reset HP
LOW PRESSURE: Adjustment range -0.3 bar to 7 bar
Differential from 1 bar to 5 bar
HIGH PRESSURE: Adjustment range 6 bar to 32 bar
Differential 5 bar
Connection 1/4" SAE

RANCO 017-R4701

PRESSURE SW. RANCO DUAL 17-R4705 S. HD

Automatic reset LP
Manual reset HP
LOW PRESSURE: Adjustment range -0.3 bar to 7 bar
Differential from 1 bar to 5 bar
HIGH PRESSURE: Adjustment range 6 bar to 32 bar
Differential 5 bar
Connection 1/4" SAE

RANCO 017-R4705

PRESSURE SW. RANCO DUAL 17-R4758 S. HD

Automatic reset LP
Automatic reset HP
LOW PRESSURE: Adjustment range -0.3 bar to 7 bar
Differential from 1 bar to 5 bar
HIGH PRESSURE: Adjustment range 6 bar to 32 bar
Differential 5 bar
Connection 1/4" SAE
PED certification

RANCO 017-R4758

PRESSURE SW. RANCO DUAL 17-R4759 S. HD

Automatic reset LP
Manual reset HP
LOW PRESSURE: Adjustment range -0.3 bar to 7 bar
Differential from 1 bar to 5 bar
HIGH PRESSURE: Adjustment range 6 bar to 32 bar
Differential 5 bar
Connection 1/4" SAE
PED certification

RANCO 017-R4759



LF Code: 3320278
GEV Code: LF3320278



LF Code: 5157973
GEV Code: LF5157973



LF Code: 3320281
GEV Code: LF3320281



LF Code: 3320282
GEV Code: LF3320282

PRESSURE SW. RANCO 016-R6703 LP S. HD

Automatic reset LP
LOW PRESSURE: Adjustment range -0.3 bar to 7 bar
Differential from 1 bar to 5 bar
Connection 1/4" SAE

RANCO 016-R6703

PRESSURE SW. RANCO 016-R6705 LP S. HD

Manual reset LP
LOW PRESSURE: Adjustment range -0.3 bar to 7 bar
Differential from 1 bar to 5 bar
Connection 1/4" SAE

RANCO 016-R6705

PRESSURE SW. RANCO 016-R6750 HP S. HD

Automatic reset HP
HIGH PRESSURE: Adjustment range 6 bar to 32 bar
Differential from 3 bar to 5 bar
Connection 1/4" SAE

RANCO 016-R6750

PRESSURE SW. RANCO 016-R6751 HP S. HD

Manual reset HP
HIGH PRESSURE: Adjustment range 6 bar to 32 bar
Fixed differential 5 bar
Connection 1/4" SAE

RANCO 016-R6751



LF Code: 3320283
GEV Code: LF3320283

PRESSURE SW. RANCO 016-R6758 HP S. HD

Automatic reset HP
HIGH PRESSURE: Adjustment range 6 bar to 32 bar
Differential from 3 bar to 5 bar
Connection 1/4" SAE
PED certification

RANCO 016-R6758





LF Code: 3320289
GEV Code: LF3320289

MINI-PRESSURE SW. RANCO LPS-0 6-1 8LP

LP auto-reset
LOW PRESSURE:
cut out/open pressure 0.6 bar
cut in/close out pressure 0.6 bar
connection 1/4" Female Flare
cable length 1 m

RANCO LPS-06-18



LF Code: 3320290
GEV Code: LF3320290

MINI-PRESSURE SW. RANCO LPS-1 7-3 4LP

LP auto-reset
LOW PRESSURE:
cut out/open pressure 1.7 bar
cut in/close out pressure 3.4 bar
connection 1/4" Female Flare
cable length 1 m

RANCO LPS-17-34



LF Code: 3320291
GEV Code: LF3320291

MINI-PRESSURE SW. RANCO LPS-3 8-5 9LP

LP auto-reset
LOW PRESSURE:
cut out/open pressure 3.8 bar
cut in/close out pressure 5.9 bar
connection 1/4" Female Flare
cable length 1 m

RANCO LPS-38-59



LF Code: 3320292
GEV Code: LF3320292

MINI-PRESSURE SW. RANCO LPS-6 9-9 0LP

LP auto-reset
LOW PRESSURE:
cut out/open pressure 6.9 bar
cut in/close out pressure 9.0 bar
connection 1/4" Female Flare
cable length 1 m

RANCO LPS-69-90



LF Code: 3320293
GEV Code: LF3320293

MINI-PRESSURE SW. RANCO HPS-18-13 HP

HP auto-reset
HIGH PRESSURE:
cut out/open pressure 18 bar
cut in/close out pressure 13 bar
connection 1/4" Female Flare
cable length 1 m

RANCO HPS-18-13



LF Code: 3320294
GEV Code: LF3320294

MINI-PRESSURE SW. RANCO HPS-26-20 HP

HP auto-reset
HIGH PRESSURE:
cut out/open pressure 26 bar
cut in/close out pressure 20 bar
connection 1/4" Female Flare
cable length 1 m

RANCO HPS-26-20



LF Code: 3320280
GEV Code: LF3320280

MINI-PRESSURE SW. RANCO HPS-28-21 HP

HP auto-reset
HIGH PRESSURE:
cut out/open pressure 28 bar
cut in/close out pressure 21 bar
connection 1/4" Female Flare
cable length 1 m

RANCO HPS-28-21




LF Code: 3320295
GEV Code: LF3320295

MINI-PRESSURE SW. RANCO HPS-32-24 HP

HP auto-reset
HIGH PRESSURE:
cut out/open pressure 32 bar
cut in/close out pressure 24 bar
connection 1/4" Female Flare
cable length 1 m

RANCO HPS-32-24

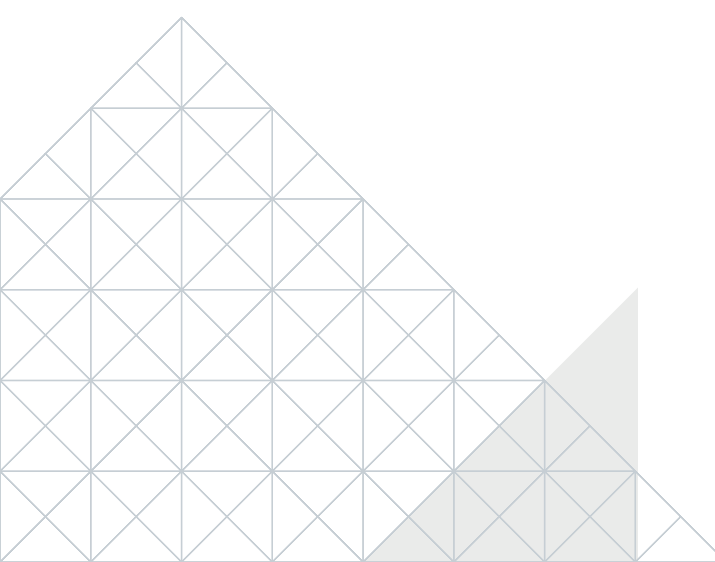



GEV Großküchen-Ersatzteil-Vertrieb GmbH

Gadastr. 4
85232 Bergkirchen - Germany
T +49 8142 6522-50
info.ger@repagroup.com
www.gev-online.com

LF S.p.A. a socio unico

Via Voltri 80
47522 Cesena FC - Italy
T +39 0547 341111
info.it@repagroup.com
www.lfspareparts724.com

EPGC S.a.s.

13 Rue des Forts
59960 Neuville en Ferrain - France
T +33 3 20250621
france@repagroup.com
www.epgc.com

Commercial Catering Spares Ltd.

Block C - Axis Point Hill Top Road
Heywood - Lancashire - OL10 2RQ - UK
T +44 1706 621 155
info@ccspares.co.uk
www.ccspares.co.uk

Atel S.r.l. a socio unico

Via Selvuzzis 51/2
33100 Udine UD - Italy
T +39 0432 602095
info@atelitalia.com
www.atelitalia.com